Apple Macintosh Performa 5400

With a powerful 120MHz PowerPC 603e CPU and an industry-standard PCI expansion slot, the Apple Macintosh Performa 5400 is the ideal home or general office computer with room to expand.

The computer's 120-megahertz PowerPC 603e processor lets you easily run an abundance of Macintosh applications. To get you started, there are home and entertainment programs, plus a collection of multimedia reference CDs.
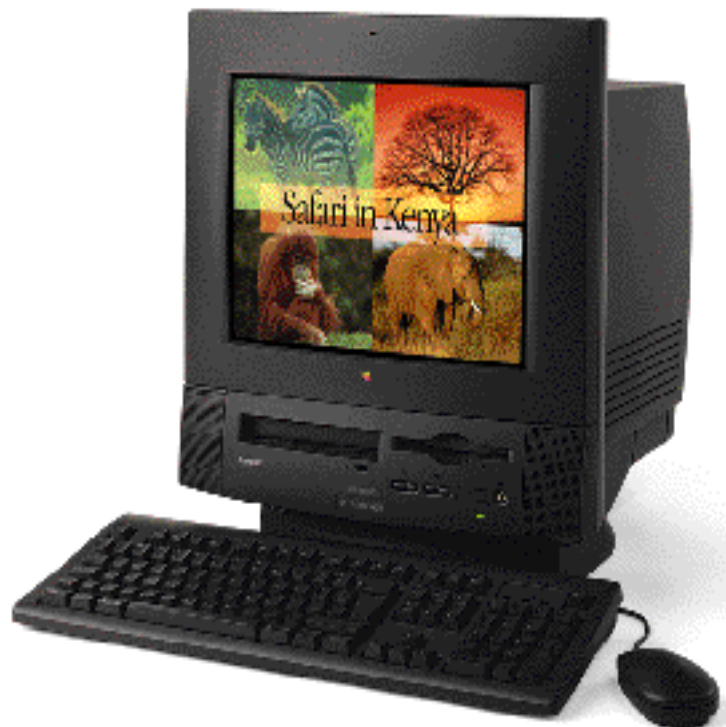
The Performa 5400 includes multimedia features that are expensive add-ons with other computers, including a CD-ROM drive for multimedia applications and a 15-inch monitor (325mm diagonal viewable image size) to display vibrant colours. Using the optional capabilities, you can watch television in a window and view and record video from VCRs and video cameras. There's a built-in

microphone to directly record your own sounds. These multimedia features are made more lifelike through the built-in stereo speakers enhanced by SRS 3D surround sound and the Macintosh 16-bit stereo sound system.

Connect to the world of information services, including the Internet, with the optional 14.4 and 28.8-kilobits-per-second modem. Both modems also allow you to use your computer as a fax or answering machine.

If you need even more advanced capabilities in the future, expansion is easy through the industry-standard Peripheral Component Interconnect (PCI) slot and built in SCSI support.

The Macintosh Performa 5400: Performance, convenience and sophistication that will add elegance to your home or office.

Features

Complete, ready-to-use system
- Computer, multiple scan 15-inch colour display (325mm diagonal viewable image size), CD-ROM drive, floppy disk drive, hard disk, microphone, and stereo speakers integrated into one convenient and stylish package
- Matching keyboard, mouse, and all necessary cables
- Apple System 7.5 software, including Apple Guide software for step-by-step help with basic system operation, QuickTime multi-media software, Macintosh PC Exchange software, and QuickDraw 3D
- Built-in tray-loading CD-ROM player
- Front-panel volume control and headphone/speaker jack
- CD-quality digital sound with SRS 3D surround sound

Preinstalled software
- Apple System 7.5
- ClarisWorks productivity
- At Ease security and sharing
- Macintosh PC-Exchange
- Mavis Beacon Teaches Typing
- Spectre Challenger game
- Hypercard runtime

CD-ROM titles
- Groliers Encyclopædia
- San Diego Zoo Presents The Animals
- Guinness Disk of Records

Easy to expand
- Internal connectors for easy installation of optional TV system, video input and 14.4 or 28.8-Kbps modem for data, fax, voice, and digital answering machine

Apple Macintosh Performa 5400

What's included

Macintosh Performa 5400
Computer with built-in multiple scan 15-inch display (325mm diagonal viewable image size), hard disk, CD-ROM drive, floppy disk drive. Mouse, keyboard, and cables also included.
Check with your authorised Apple reseller for specific configuration information and ordering numbers.

Optional Enhancements

Apple Presentation System

External Video Connector

TV-Tuner Kit

Video-in Kit

14.4kbps or 28.8kbps internal modem

Product specifications are subject to change.
Please check with your authorised Apple reseller for current specifications, configurations, accessories and prices.

Call 1-800 025 355 for the name of

Technical Specifications

Microprocessor
- PowerPC 603e processor running at 120 MHz
- 32K internal cache
- Integrated floating-point unit
- 64-bit memory bus
- Optional High Performance Module (256K level 2 cache; may be included with some models)

Memory
- Can be expanded to 136MB using two 64MB DIMMs
- Uses 64-bit-wide, 168-pin, 70-nanosecond or faster, fast-paged-mode DIMMs, (1K and 2K refresh rate)

Disk drives
- Internal hard disk drive
- Internal Apple SuperDrive floppy disk drive
— Uses high-density, 1.4MB floppy disks
— Reads, writes, and formats Macintosh, Windows, MS-DOS, OS/2, and ProDOS disks
- Internal quadruple-speed AppleCD 600i CD-ROM drive

Display
Built-in display
- 15-in RGB colour display (325mm diagonal viewable image size)
- 0.28-mm dot pitch
- Noninterlaced, flat, square cathode-ray tube (CRT)
- User-adjustable resolutions from 640 by 480 pixels to 832 by 624 pixels
- Resolution can be changed without restarting the computer
- Refresh rate up to 75 Hz
- Meets SWEDAC MPR2 international guidelines for magnetic-field emissions

Display support
- 16-bit colour for display of up to 32,768 colours at 640- by 480-pixel or 800- by 600-pixel resolution
- 8-bit colour for display of 256 colours at 800- by 600-pixel or 832- by 624-pixel resolution
- 1MB video frame buffer (independent of system RAM)

Sound
- Stereo 16-bit sound

- Built-in stereo speakers
- Built-in microphone
- Sound-output port
- Sound-input port
- Front headphone jack and volume control
- Apple sound enhancements, including SRS 3D surround sound which recreates 3 dimensional sound information from any stereo source, dramatically enhancing realism

Expansion interfaces
- PCI expansion slot for industry-standard 175mm, 15-watt expansion cards
- Apple Desktop Bus port for mouse, keyboard, and other devices (multiple devices can be connected to each other from one port)
- RS-232/RS-422 serial port for an AppleTalk network connection, other networking connections, communications equipment (including GeoPort-compatible devices), or a printer
- SCSI interface port for as many as six external SCSI devices, such as disk drives and/or CD-ROM drives
- Optional video-out port for connection to an external monitor for video mirroring (also supports connection to an NTSC or PAL video-out interface box, such as the Apple Presentation System)
- Communications slot
- Video slot
- TV tuner slot

Electrical requirements
- Line voltage: 110 to 240 V AC, RMS, single phase, nominal
- Frequency: 50 to 60 Hz
- Power: 220 W maximum (continuous)
- Includes low-power sleep mode
- U.S. EPA Energy Star compliant

Size and weight
- Height: 44.5 cm (17.5 in.)
- Width: 38.3 cm (15.1 in.)
- Depth: 40.6 cm (16 in.)
- Weight: 21 kg (47 lb.)
- Built-in base tilts from –5° to +15°, swivels a full 360°

Operating environment
- Operating temperature: 10° to 40° C (50° to

April 1996 LD2369